


DIP SWITCHES

HALOGEN FREE OFF SIDE HPS8 Pitch=1.27mm


- Rating: DC24V 25mA
- Stroke: 0.7mm
- Force: 0.51kgf Max.
- Life: 2,000 Cycles
- Package: 2,000 Pcs/Reel
- Except:
HPS801-E~HPS803-E: 3,000 Pcs/Reel

Dimension:

Part No.	Poles	Dimension A
HPS801-E	1	2.31
HPS802-E	2	3.58
HPS803-E	3	4.85
HPS804-E	4	6.12
HPS805-E	5	7.39
HPS806-E	6	8.66
HPS808-E	8	11.20
HPS810-E	10	13.74
HPS812-E	12	16.28

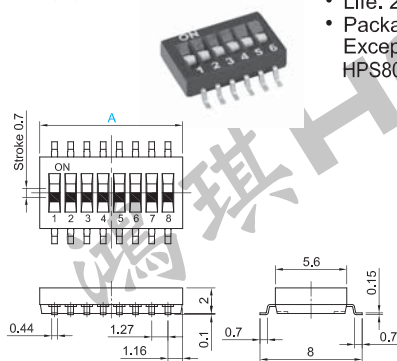

Pad Layout




HALOGEN FREE ON SIDE HPS82 Pitch=1.27mm


- Rating: DC24V 25mA
- Stroke: 0.7mm
- Force: 0.51kgf Max.
- Life: 2,000 Cycles
- Package: 2,000 Pcs/Reel
- Except:
HPS821-E~HPS823-E: 3,000 Pcs/Reel

Dimension:

Part No.	Poles	Dimension A
HPS821-E	1	2.31
HPS822-E	2	3.58
HPS823-E	3	4.85
HPS824-E	4	6.12
HPS825-E	5	7.39
HPS826-E	6	8.66
HPS828-E	8	11.20
HPS8210-E	10	13.74
HPS8212-E	12	16.28

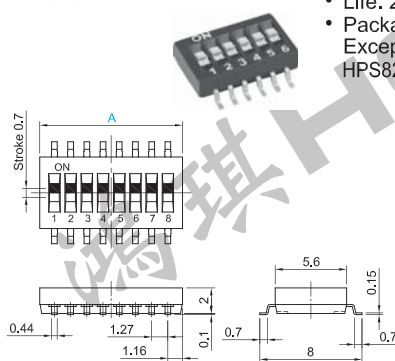

Pad Layout




OFF SIDE KHS Pitch=1.27mm


- Rating: DC24V 25mA
- Force: 500gf
- Life: 1,000 Cycles
- Package: 2,000 Pcs/Reel

Dimension:

Part No.	Poles	Dimension A
KHS02	2	3.67
KHS04	4	6.21
KHS06	6	8.75
KHS08	8	11.29
KHS10	10	13.83

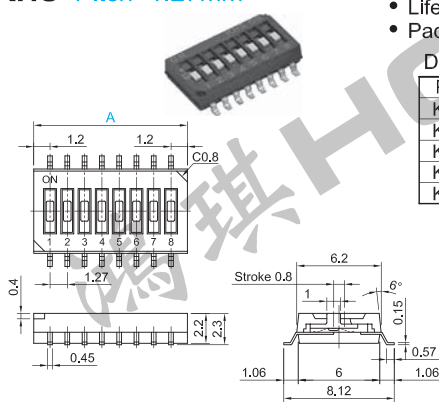

Pad Layout




OFF SIDE HPS10 Pitch=1.0mm


- Rating: DC24V 25mA
- Stroke: 0.6mm
- Force: 0.306kgf Max.
- Life: 1,000 Cycles
- Package: 2,000 Pcs/Reel

Dimension:

Part No.	Poles	Dimension A
HPS1001	1	2
HPS1002	2	3
HPS1003	3	4
HPS1004	4	5
HPS1008	8	9

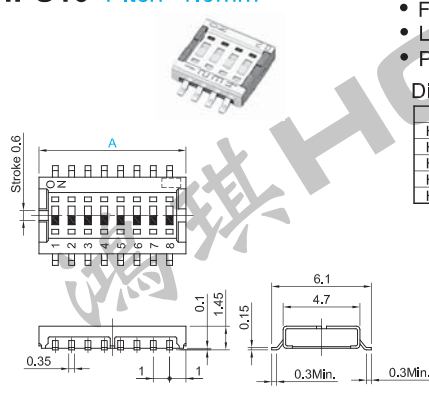

Pad Layout




FLAT KNOB & TAPE SEAL TYPE LSM7 Pitch=2.54mm


- Rating: DC24V 25mA
- Force: 1kgf Max.
- Life: 2,000 Cycles

Dimension:

Part No.	Poles	Dimension A
LSM701	1	2.98
LSM702	2	5.52
LSM703	3	8.06
LSM704	4	10.60
LSM705	5	13.14
LSM706	6	15.68
LSM707	7	18.22
LSM708	8	20.76
LSM709	9	23.30
LSM710	10	25.84
LSM712	12	30.92

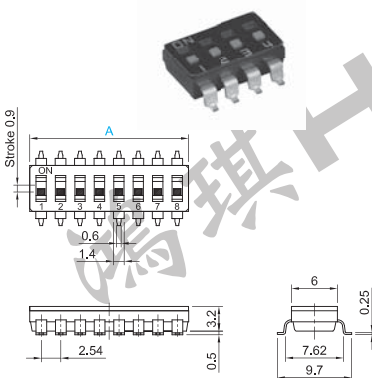

Pad Layout




CONVEX KNOB TYPE LSM8 Pitch=2.54mm


- Rating: DC24V 25mA
- Force: 1kgf Max.
- Life: 2,000 Cycles

Dimension:

Part No.	Poles	Dimension A
LSM801	1	2.98
LSM802	2	5.52
LSM803	3	8.06
LSM804	4	10.60
LSM805	5	13.14
LSM806	6	15.68
LSM807	7	18.22
LSM808	8	20.76
LSM809	9	23.30
LSM810	10	25.84
LSM812	12	30.92

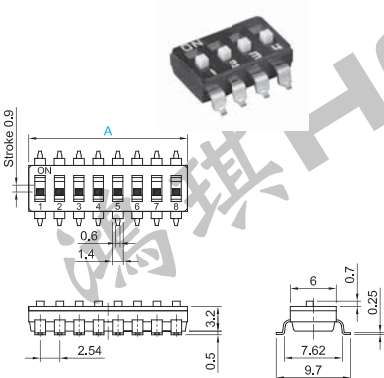

Pad Layout




LDS7 Pitch=2.54mm


- Rating: DC24V 25mA
- Force: 1kgf Max.
- Life: 5,000 Cycles

Dimension:

Part No.	Poles	Dimension A
LDS701	1	2.98
LDS702	2	5.52
LDS703	3	8.06
LDS704	4	10.60
LDS705	5	13.14
LDS706	6	15.68
LDS707	7	18.22
LDS708	8	20.76
LDS709	9	23.30
LDS710	10	25.84
LDS712	12	30.92

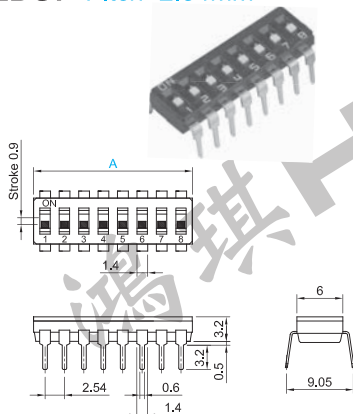

Mounting Hole Layout




LDS8 Pitch=2.54mm

- Rating: DC24V 25mA
- Force: 1kgf Max.
- Life: 5,000 Cycles

Dimension:

Part No.	Poles	Dimension A
LDS801	1	2.98
LDS802	2	5.52
LDS803	3	8.06
LDS804	4	10.60
LDS805	5	13.14
LDS806	6	15.68
LDS807	7	18.22
LDS808	8	20.76
LDS809	9	23.30
LDS810	10	25.84
LDS812	12	30.92

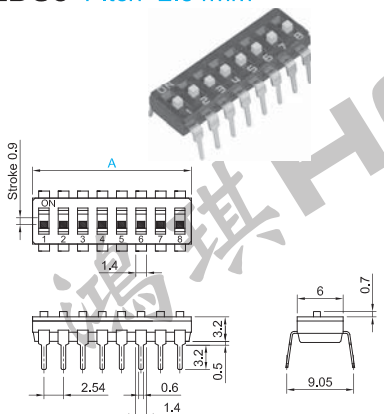

Mounting Hole Layout

