


SMD TACTILE SWITCHES

STS-012-B H=5.0mm


- Rating: DC16V 50mA Max.
- Stroke: 1.3mm
- Force: 250±70gf
- Life: 100,000 Cycles
- Package: 2,000 Pcs/Reel



Circuit



Pad Layout

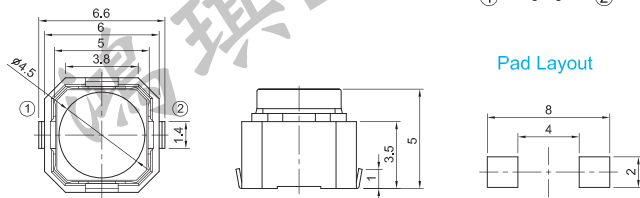

STS-089-B H=2.5mm


- Rating: DC12V 20mA
- Stroke: 0.17mm
- Force: 240±60gf
- Life: 30,000 Cycles
- Package: 6,000 Pcs/Reel



Circuit



Pad Layout

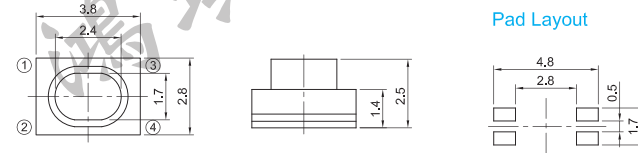


WITH TAB

STS-093-A H=2.0mm


- Rating: DC12V 50mA
- Stroke: 0.2mm
- Force: 160±50gf
- Life: 100,000 Cycles
- Package: 3,000 Pcs/Reel



Circuit



Pad Layout

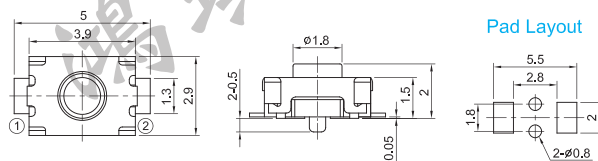

STS-095 H=7.5mm


- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: 160±50gf
- Life: 100,000 Cycles
- Package: 750 Pcs/Reel



Circuit



Pad Layout

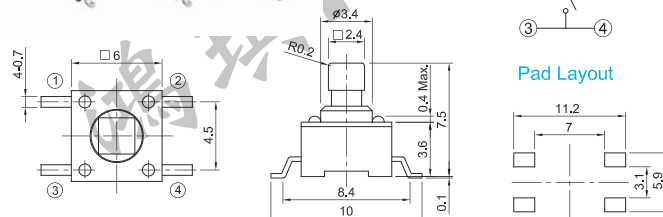


STS-097-B H=2.5mm


- Rating: DC32V 50mA
- Stroke: 0.5mm
- Force: 260±50gf
- Life: 200,000 Cycles
- Package: 2,500 Pcs/Reel



Circuit



Pad Layout

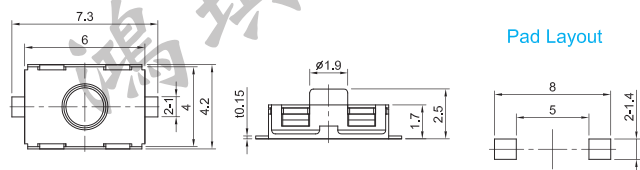

STS-128 H=3.5mm


- Rating: DC2V 10μA~DC15V 20mA
- Stroke: 0.25mm
- Force: 200±60gf
- Life: 1,000,000 Cycles
- Package: 3,000 Pcs/Reel



Circuit



Pad Layout

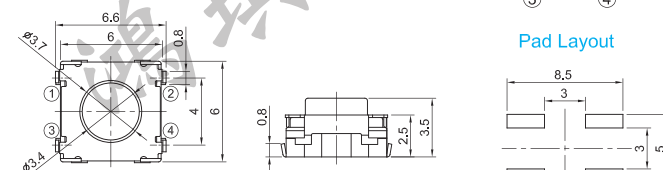


STS-129 H=4.0mm


- Rating: DC2V 10μA~DC15V 20mA
- Stroke: 0.75mm
- Force: 350±100gf
- Life: 100,000 Cycles
- Package: 2,000 Pcs/Reel



Circuit



Pad Layout

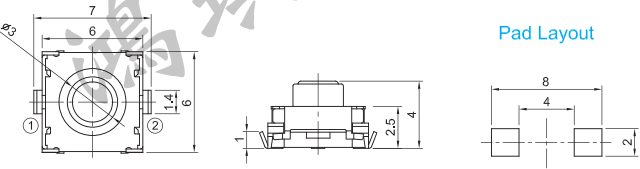

STS-236 H=2.5mm

- Rating: DC12V 50mA
- Stroke: 0.3mm
- Force: 260±50gf
- Life: 100,000 Cycles
- Package: 2,500 Pcs/Reel



Circuit



Pad Layout

